



Standard Hand Signals

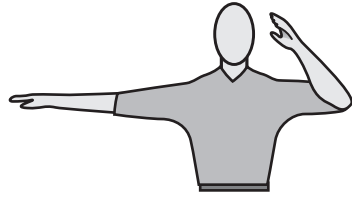

Left Turn



Right Turn



Wheel Chocked



Straight Forward or Back



Stop

Note: These are a few examples of common hand signals. Marshalls should use the signals shown in International Civil Aviation Organization Annex 2, *Rules of the Air*, and in the International Air Transport Association *Airport Handling Manual*. ICAO recommends that the marshaller's hands be "illuminated as necessary" to be visible to the pilot. IATA requires that the marshaller wear a "distinctive identification vest" and use fluorescent-colored gloves, wands or other devices during the day, and illuminated wands at night or in low visibility.